


# ARCHETYPE

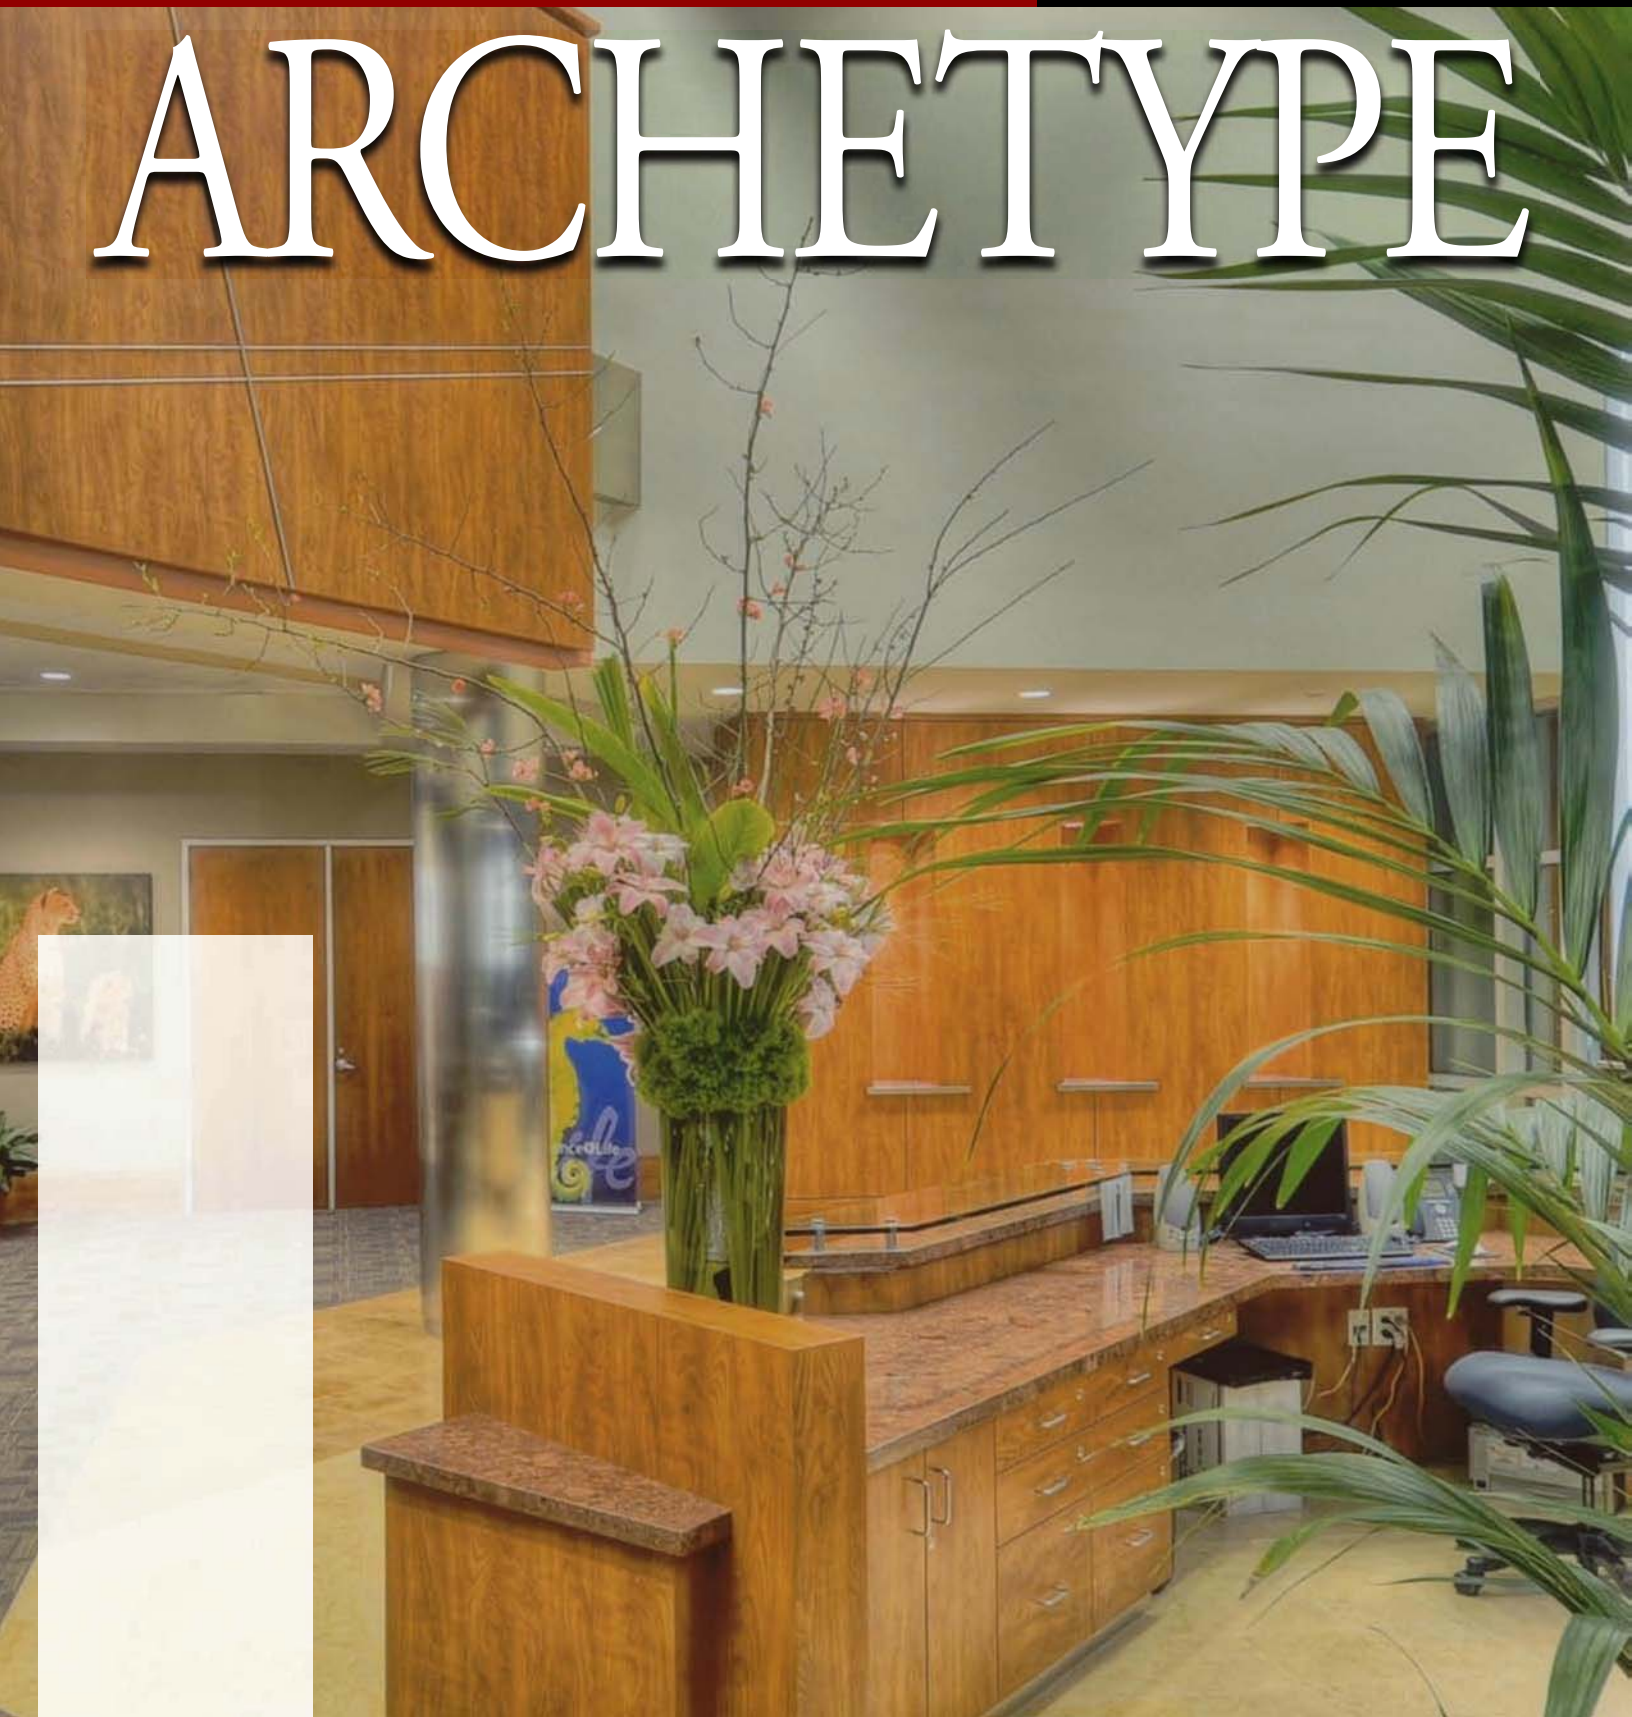

Woodwork Institute  
P.O. Box 980247  
West Sacramento, CA 95798-0247  
Ph: (916) 372-9943 ♦ Fax: (916) 372-9950  
E-mail: [info@woodinst.com](mailto:info@woodinst.com)  
[www.woodworkinstitute.com](http://www.woodworkinstitute.com)

# *Best of the Best*

2010

*Part Two*





WINNER OF THE 2010  
**BERNARD B. BARBER JR. AWARD**  
**FOR EXCELLENCE**  
REEVES ENTERPRISES  
WOODWORKER: DENNIS REEVES  
ARCHITECT : MCFARLANE ARCHITECTS  
GENERAL CONTRACTOR: SIERRA GROUP

## Bernie B. Barber Award for Excellence Reeves Enterprises

This project is in the main lobby at Life Technologies corporate headquarters. The millwork package consists of a reception desk, paneled niche wall, 12" tall base throughout the room, an 8' x 10' decorative wall piece and ceiling trellis system.

The trellis system hangs from the 25' ceiling. It consists of 15 - 1/2" x 4' x 4' laminated panels attached to the ceiling joists using 1" standoffs at each corner. The hanging part of the trellis is 12" tall x 12' wide x 20' long, laminated Wilsonart Wild Cherry. It is attached to the roof trusses using unistrut and allthread. It took 2 scissor lifts with 2 men on each lift and 1 ground man 2 days to install the unistrut structure to the roof trusses before the ceiling was framed. After the ceiling was dry walled and painted, it took 4 scissor lifts, with 2 men on each lift and 2 ground men 4 days to install the finished product.

The 8' x 10' decorative wall piece is laminated Wilsonart Wild Cherry. With semi-recessed aluminum trim routed into the face of it. It took 2 scissor lifts, with 3 men on each lift and 2 ground men 1 day to install.

The 12" tall base and paneled niche wall are Wilsonart Wild Cherry. The reception desk is Wilsonart Wild Cherry with Nevamar Champagne Sagawood front panels on stand offs. The desktop is granite with 3/4" thick glass on stand offs

The entire lobby took 640 man hours to produce in the shop and 750 man hours to install.

